
TRACTOR-TOWED SCRAPER





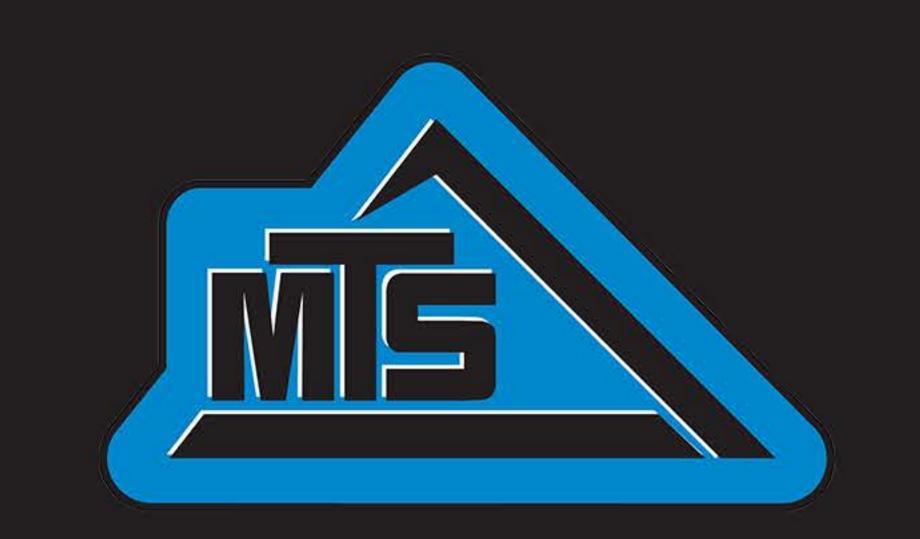


MOBILE TRACK SOLUTIONS

A young company with a long history.







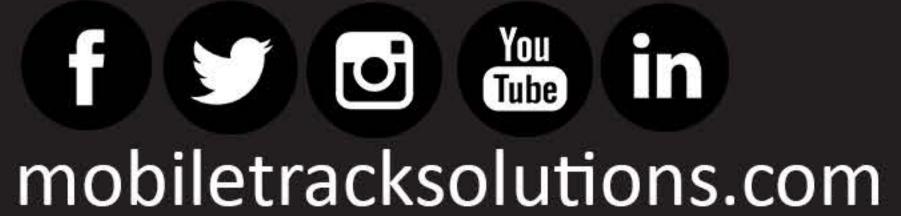

Elkader, IA (563) 245-6871

ESPECIFICATIONS LES





Scraper Bowl		
ISO Capacity	28 yd³	21.4 m ³
ISO Capacity - Sideracks	31 yd³	23.7 m ³
ISO Capacity - Sideracks & Apron SG	33.6 yd³	25.7 m ³
Width of Cut, To Router Bits	157.5 in	4,001 mm
Capacity Struck	15.5 yd³	11.9 m ³
Max Depth of Cut	6 in	152 mm
Ground Clearance @ Cutting Edge	26.5 in	673 mm
Max Depth of Cut	6 in	152 mm
Apron Opening	75 in	1,905 mm

Dimensions		
Width (Inside of Bowl)	154 in	3,912 mm
Width (Outside Rear Tires)	158 in	4,013 mm
Width (Outside Bowl)	166 in	4,216 mm
Height (Floor to top of Ejector)	82 in	2,083 mm
Height (Sidewall)	42 in	1,067 mm
Length (Floor)	59 in	1,499 mm
Push Block to Axle	79 in	2,006 mm
Axle to Cutting Edge	132 in	3,352 mm
Cutting Edge to Hitch	258 in	6,553 mm
Maximum Load Rating	80,000 lbs	36,000 kg
	Width (Inside of Bowl) Width (Outside Rear Tires) Width (Outside Bowl) Height (Floor to top of Ejector) Height (Sidewall) Length (Floor) Push Block to Axle Axle to Cutting Edge Cutting Edge to Hitch	Width (Inside of Bowl) Width (Outside Rear Tires) 158 in Width (Outside Bowl) Height (Floor to top of Ejector) Height (Sidewall) Length (Floor) Push Block to Axle 79 in Axle to Cutting Edge 132 in Cutting Edge to Hitch

	Shipping Modifications		
3	Height (Overall Shipping)	110 in	2,794 mm
2	Width (Overall Shipping)	166 in	4,216 mm
4	Length (Overall Shipping)	469 in	11,912 mm
	Empty Weight	35,980 lbs	16,320 kg

ISO Weights	
Distribution Empty (tongue)	23%
Distribution Empty (Axle)	77%
Distribution Loaded (Tongue)	25%
Distribution Loaded (Axle)	75%

Brakes and Tires	
Brake Type	Dry Disk
Caliper Quantity	4
Tire Quantity	4
Standard Tires	26.5R25

Hydraulics		
Bowl Cylinder Bore	7 in	178 mm
Bowl Cylinder Stroke	17 in	432 mm
Apron Cylinder Bore	5 in	127 mm
Apron Cylinder Stroke	34.3 in	871 mm
Ejector Cylinder Bore	5 in	127 mm
Ejector Cylinder Stroke	60 in	1,524 mm

